


# COSHOCTON COUNTY COMMISSIONERS COURTHOUSE SIDEWALK IMPROVEMENT PROJECT


401 1/2 MAIN STREET  
COSHOCTON, OHIO 43812

HORIZONTAL  
SCALE IN FEET



TITLE SHEET

COSHOCTON COUNTY  
ENGINEER'S OFFICE  
(740) 622-2135 FAX: (740) 623-6512



DESIGNER

CJS

REVIEWER

CJS 03-24-25

PROJECT ID

2024102301

SHEET

1

TOTAL

5

## PROJECT DESCRIPTION

THE COSHOCTON COUNTY COMMISSIONERS ARE UNDERTAKING A SIDEWALK IMPROVEMENT PROJECT AT THE COSHOCTON COUNTY COURTHOUSE TO ENHANCE PEDESTRIAN ACCESSIBILITY, SAFETY, AND AESTHETICS. THE PROJECT FOCUSES ON REPLACING SIDEWALK SECTIONS WITHIN THE COURTYARD AND ADJACENT TO THE COURTHOUSE.

## EARTH DISTURBED AREAS

THIS PROJECT INVOLVES EARTH-DISTURBING ACTIVITIES OF LESS THAN ONE (1) ACRE. THEREFORE, A STORMWATER POLLUTION PREVENTION PLAN (SWPPP) AND NPDES PERMIT ARE NOT REQUIRED. THE CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES (BMPs) TO CONTROL EROSION AND SEDIMENTATION DURING CONSTRUCTION AS PER ODOT ITEM 207 AND LOCAL REQUIREMENTS.


## COURTHOUSE ACCESS

THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING THE REMOVAL AND AND REPLACEMENT OF THE SIDEWALK IN A MANNER THAT ENSURES THE NORMAL OPERATIONS OF THE COURTHOUSE ARE NOT DISRUPTED. A MINIMUM OF ONE (1) ADA-ACCESSIBLE ROUTE MUST BE MAINTAINED TO THE COURTHOUSE AT ALL TIMES THROUGHOUT CONSTRUCTION.

TEMPORARY TRAFFIC CONTROL (TTC) MEASURES SHALL BE IMPLEMENTED IN ACCORDANCE WITH ODOT ITEM 614 TO SAFELY DIRECT PEDESTRIAN TRAFFIC AROUND CLOSED SIDEWALK SECTIONS AND TOWARD THE OPEN ADA-ACCESSIBLE ROUTE. PEDESTRIAN DETOURS MUST BE CLEARLY MARKED, AND ALL TEMPORARY ROUTES MUST COMPLY WITH ADA STANDARDS.

## 2023 SPECIFICATIONS


ALL WORK SHALL BE COMPLETED IN ACCORDANCE WITH THE 2023 EDITION OF THE OHIO DEPARTMENT OF TRANSPORTATION (ODOT) CONSTRUCTION AND MATERIAL SPECIFICATIONS, AND ANY ADDITIONAL SPECIFICATIONS NOTED IN THE PLANS AND BID DOCUMENTS.

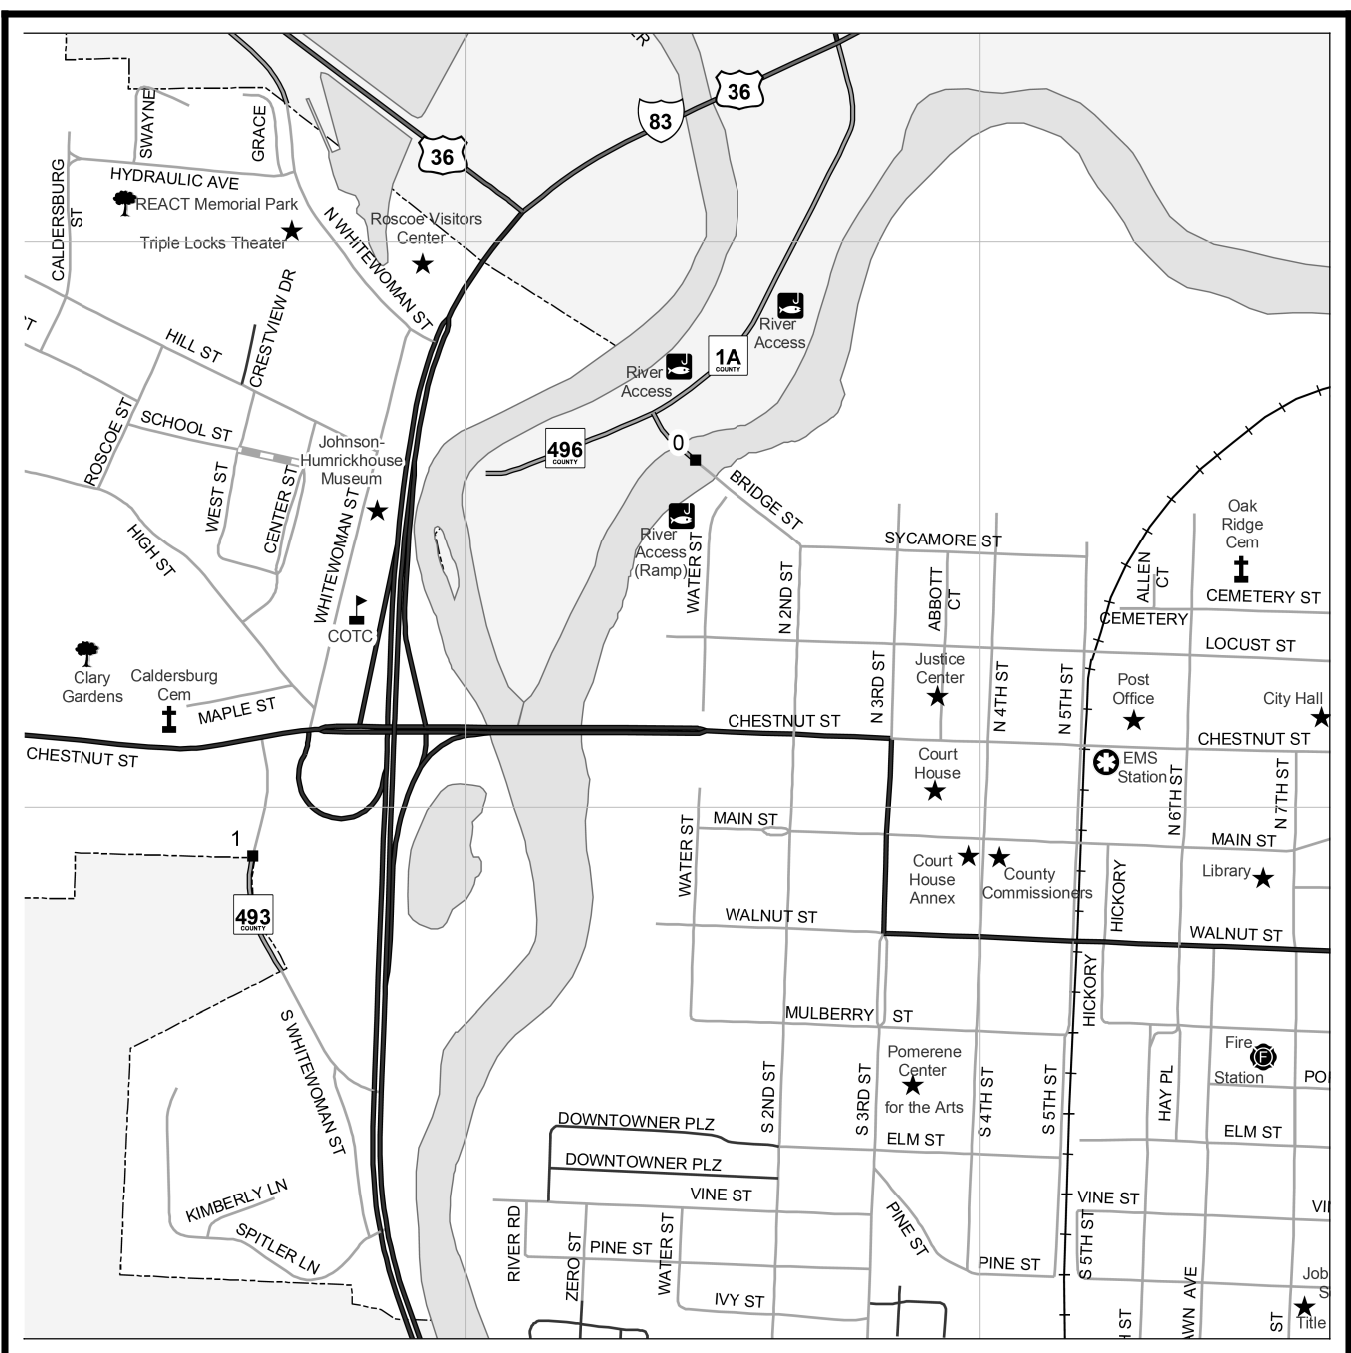

## LOCATION MAP

(1" = 1000')

LATITUDE: 40°16'28" LONGITUDE: -81°51'58"



## INDEX OF SHEETS:


TITLE SHEET  
GENERAL NOTES AND SPECIFICATIONS  
EXISTING CONDITIONS AND DEMOLITION PLAN  
PROPOSED SITE PLAN  
CONSTRUCTION DETAILS

1  
2  
3  
4  
5

UNDERGROUND UTILITIES  
Contact Two Working Days  
Before You Dig




OHIO811, 8-1-1, or 1-800-362-2764  
(Non members must be called directly)

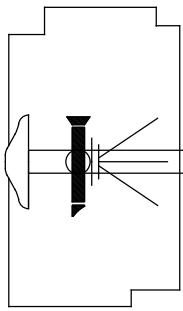GENERAL NOTES <div><div><div>1.</div><div>ALL WORK SHALL BE COMPLETED IN ACCORDANCE WITH THE OHIO DEPARTMENT OF TRANSPORTATION (ODOT) CONSTRUCTION AND MATERIAL SPECIFICATIONS, 2023 EDITION, UNLESS OTHERWISE NOTED.</div></div><div><div>2.</div><div>ALL SIDEWALKS, RAMPS, STEPS, AND HANDRAILS SHALL BE IN COMPLIANCE WITH THE STANDARDS OUTLINED IN THE AMERICANS WITH DISABILITIES ACT (ADA).</div></div><div><div>3.</div><div>THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS REQUIRED FOR THE PROJECT PRIOR TO STARTING CONSTRUCTION.</div></div><div><div>4.</div><div>THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL UTILITIES BEFORE STARTING ANY EARTH DISTURBING ACTIVITIES. COORDINATION WITH OHIO UTILITIES PROTECTION SERVICES (OUPS) IS REQUIRED. CONTACT OUPS AT 811 OR 1-800-362-2764 AT LEAST 48 HOURS BEFORE DIGGING.</div></div><div><div>5.</div><div>CONSTRUCTION SHALL BE LIMITED TO THE HOURS OF 7 AM TO 7 PM, MONDAY THROUGH SATURDAYS. NO WORK SHALL OCCUR ON SUNDAYS EXCEPT BY PRIOR WRITTEN APPROVAL FROM THE PROJECT MANAGER. NO WORK IS PERMITTED ON FEDERAL HOLIDAYS.</div></div><div><div>6.</div><div>ALL WORK SHALL BE SUBJECT TO INSPECTION BY THE COSHOCTON COUNTY COMMISSIONERS OR THEIR REPRESENTATIVES.</div></div><div><div>7.</div><div>THE SITE SHALL BE KEPT CLEAN AT ALL TIMES, AND ALL DEBRIS SHALL BE REMOVED DAILY. FINAL CLEANUP SHALL OCCUR BEFORE PROJECT ACCEPTANCE.</div></div><div><div>8.</div><div>DISTURBED AREAS SHALL BE RESTORED TO THEIR ORIGINAL CONDITION OR BETTER IN ACCORDANCE WITH ODOT ITEM 659.</div></div><div><div>9.</div><div>A FINAL INSPECTION WILL BE CONDUCTED BY THE COSHOCTON COUNTY COMMISSIONERS OR THEIR REPRESENTATIVES TO ENSURE ALL WORK IS COMPLETED SATISFACTORILY. A PUNCH LIST OF DEFICIENCIES, IF ANY, MUST BE ADDRESSED BEFORE FINAL ACCEPTANCE.</div></div><div><div>10.</div><div>THE CONTRACTOR SHALL BE RESPONSIBLE FOR RE-ESTABLISHING THE NEW SIDEWALK IN THE SAME LOCATION AS THE EXISTING SIDEWALK THAT WAS REMOVED. THE CONTRACTOR SHALL PERFORM ANY MEASUREMENTS, STAKING, OR LAYOUT WORK THEY DEEM NECESSARY TO ENSURE PROPER ALIGNMENT AND COMPLIANCE WITH THE PLANS. SUPERVISION BY A LICENSED SURVEYOR IS NOT REQUIRED UNLESS SPECIFIED BY THE PROJECT MANAGER.</div></div><div><div>11.</div><div>TRAFFIC CONTROL AND PEDESTRIAN SAFETY MEASURES SHALL BE IMPLEMENTED PER ODOT ITEM 614 AND MAINTAINED THROUGHOUT THE PROJECT DURATION. ADA-COMPLIANT TEMPORARY PEDESTRIAN ROUTES MUST BE MAINTAINED AT ALL TIMES.</div></div><div><div>12.</div><div>EROSION AND SEDIMENT CONTROL MEASURES SHALL COMPLY WITH ODOT ITEM 207. MEASURES MUST BE IN PLACE PRIOR TO EARTHWORK ACTIVITIES AND MAINTAINED THROUGHOUT CONSTRUCTION.</div></div><div><div>13.</div><div>ALL REMOVED MATERIALS, INCLUDING CONCRETE, SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE DISPOSED OF OFF-SITE IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.</div></div><div><div>14.</div><div>THE SUBGRADE SHALL BE PREPARED IN ACCORDANCE WITH ODOT ITEM 204. IF UNSUITABLE SOIL IS ENCOUNTERED, IT SHALL BE REMOVED AND REPLACED WITH COMPACTED ODOT ITEM 304 AGGREGATE BASE. FOR STANDARD CONCRETE WALK AREAS, ITEM 304 SHALL BE PLACED ONLY WHEN REQUIRED DUE TO UNSUITABLE SUBGRADE. FOR HEAVY DUTY CONCRETE WALK AREAS, A MINIMUM OF 6 INCHES OF COMPACTED ITEM 304 AGGREGATE BASE SHALL BE PLACED, REGARDLESS OF SUBGRADE CONDITIONS. ALL WORK SHALL BE APPROVED BY THE PROJECT MANAGER OR INSPECTOR PRIOR TO PLACEMENT OF NEW CONCRETE.</div></div><div><div>15.</div><div>EXCAVATION REQUIRED TO INSTALL SIDEWALKS, BASE, OR CURBING SHALL BE INCIDENTAL TO THE ASSOCIATED PAY ITEM UNLESS OTHERWISE NOTED. CONTRACTOR SHALL STRIP TOPSOIL AND EXCAVATE SUBGRADE TO REQUIRED DEPTHS TO INSTALL BASE AND CONCRETE PER PLANS.</div></div><div><div>16.</div><div>SURFACE SLOPES SHALL BE CONSTRUCTED TO ENSURE PROPER DRAINAGE. MAXIMUM CROSS SLOPE SHALL BE 1.56%, AND LONGITUDINAL SLOPE SHALL NOT EXCEED 5%.</div></div><div><div>17.</div><div>CONCRETE WALKS SHALL BE CONSTRUCTED IN ACCORDANCE WITH ODOT ITEM 608.</div></div><div><div>18.</div><div>CONCRETE MIX DESIGN SHALL MEET THE REQUIREMENTS OF ODOT ITEM 499 AND BE APPROVED BY THE PROJECT MANAGER PRIOR TO PLACEMENT.</div></div><div><div>19.</div><div>EXPANSION JOINT LOCATION AND SPACING PER ITEM 608.03</div></div><div><div>20.</div><div>WALKS SHALL BE FINISHED WITH A BROOMED SURFACE TO PROVIDE A SLIP-RESISTANCE SURFACE IN ACCORDANCE WITH ODOT ITEM 608.</div></div><div><div>21.</div><div>ALL CONCRETE SHALL BE CURED IN ACCORDANCE WITH ODOT ITEM 451. PROPER CURING COMPOUNDS SHALL BE APPLIED IMMEDIATELY AFTER FINISHING.</div></div></div>	<div>HORIZONTAL SCALE IN FEET</div> <div><div>0</div><div>15</div><div>30</div><div>60</div></div>	GENERAL NOTES AND SPECIFICATIONS	<div>COSHOCTON COUNTY ENGINEER'S OFFICE</div> <div>(740) 622-2135 FAX: (740) 623-6512</div> <div></div>	DESIGNER	CJS
				REVIEWER	CJS
				PROJECT ID	03-24-25
				2024102301	
				SHEET	TOTAL




NOTES

1. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL UTILITIES BEFORE STARTING ANY EARTH DISTURBING ACTIVITIES. COORDINATION WITH OHIO UTILITY PROTECTION SERVICES (OUPS) IS REQUIRED. CONTACT OUPS AT 811 OR 1-800-362-2764 LEAST 48 HOURS BEFORE DIGGING.
2. TEMPORARY PEDESTRIAN PATHWAYS AND TRAFFIC CONTROL MEASURES SHALL BE IMPLEMENTED PRIOR TO STARTING DEMOLITIONS TO ENSURE PUBLIC SAFETY AND ADA COMPLIANCE.
3. DEMOLITION ACTIVITIES SHALL BE SCHEDULED AND CONDUCTED IN SUCH A MANNER AS TO NOT DISRUPT COURTHOUSE OPERATIONS. ADVANCE NOTICE OF ANY DISRUPTIVE ACTIVITIES MUST BE PROVIDED TO THE PROJECT MANAGER.
4. THE CONTRACTOR SHALL DOCUMENT EXISTING SITE CONDITIONS, INCLUDING ANY VISIBLE DAMAGE TO ADJACENT STRUCTURES OR SURFACES, PRIOR TO STARTING DEMOLITION. PHOTOS SHALL BE SUBMITTED TO THE PROJECT MANAGER FOR RECORD KEEPING.
5. THE CONTRACTOR SHALL CONFINE DEMOLITION ACTIVITIES WITHIN THE LIMITS SHOWN ON THIS SHEET. ADJACENT SURFACES AND STRUCTURES MUST BE PROTECTED FROM DAMAGE.
6. THE CONTRACTOR SHALL TAKE PRECAUTIONS TO PROTECT EXISTING TREES. ROOT PRUNING, IF NECESSARY, SHALL BE PERFORMED UNDER THE SUPERVISIONS OF A CERTIFIED ARBORIST AND IN ACCORDANCE WITH APPROVED PROCEDURES.
7. ALL REMOVED MATERIALS, INCLUDING CONCRETE, SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE DISPOSED OF OFF-SITE IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.
8. EXISTING BENCHES TO BE REMOVED FROM CONCRETE PAD AND STORED. BENCHES TO BE REINSTALLED ON NEW CONCRETE PADS PER SHEET 4.
9. THE CONTRACTOR SHALL REMOVE THE EXISTING GENERAC GENERATOR FROM ITS CURRENT LOCATION PRIOR TO SIDEWALK DEMOLITION AND STORE IT IN A SAFE AND SECURE LOCATION. THE GENERATOR SHALL BE DISCONNECTED BY A QUALIFIED TECHNICIAN, AND ALL REMAINING ELECTRICAL AND MECHANICAL CONNECTIONS SHALL BE SAFELY TERMINATED AND PROTECTED IN ACCORDANCE WITH APPLICABLE CODES AND STANDARDS.

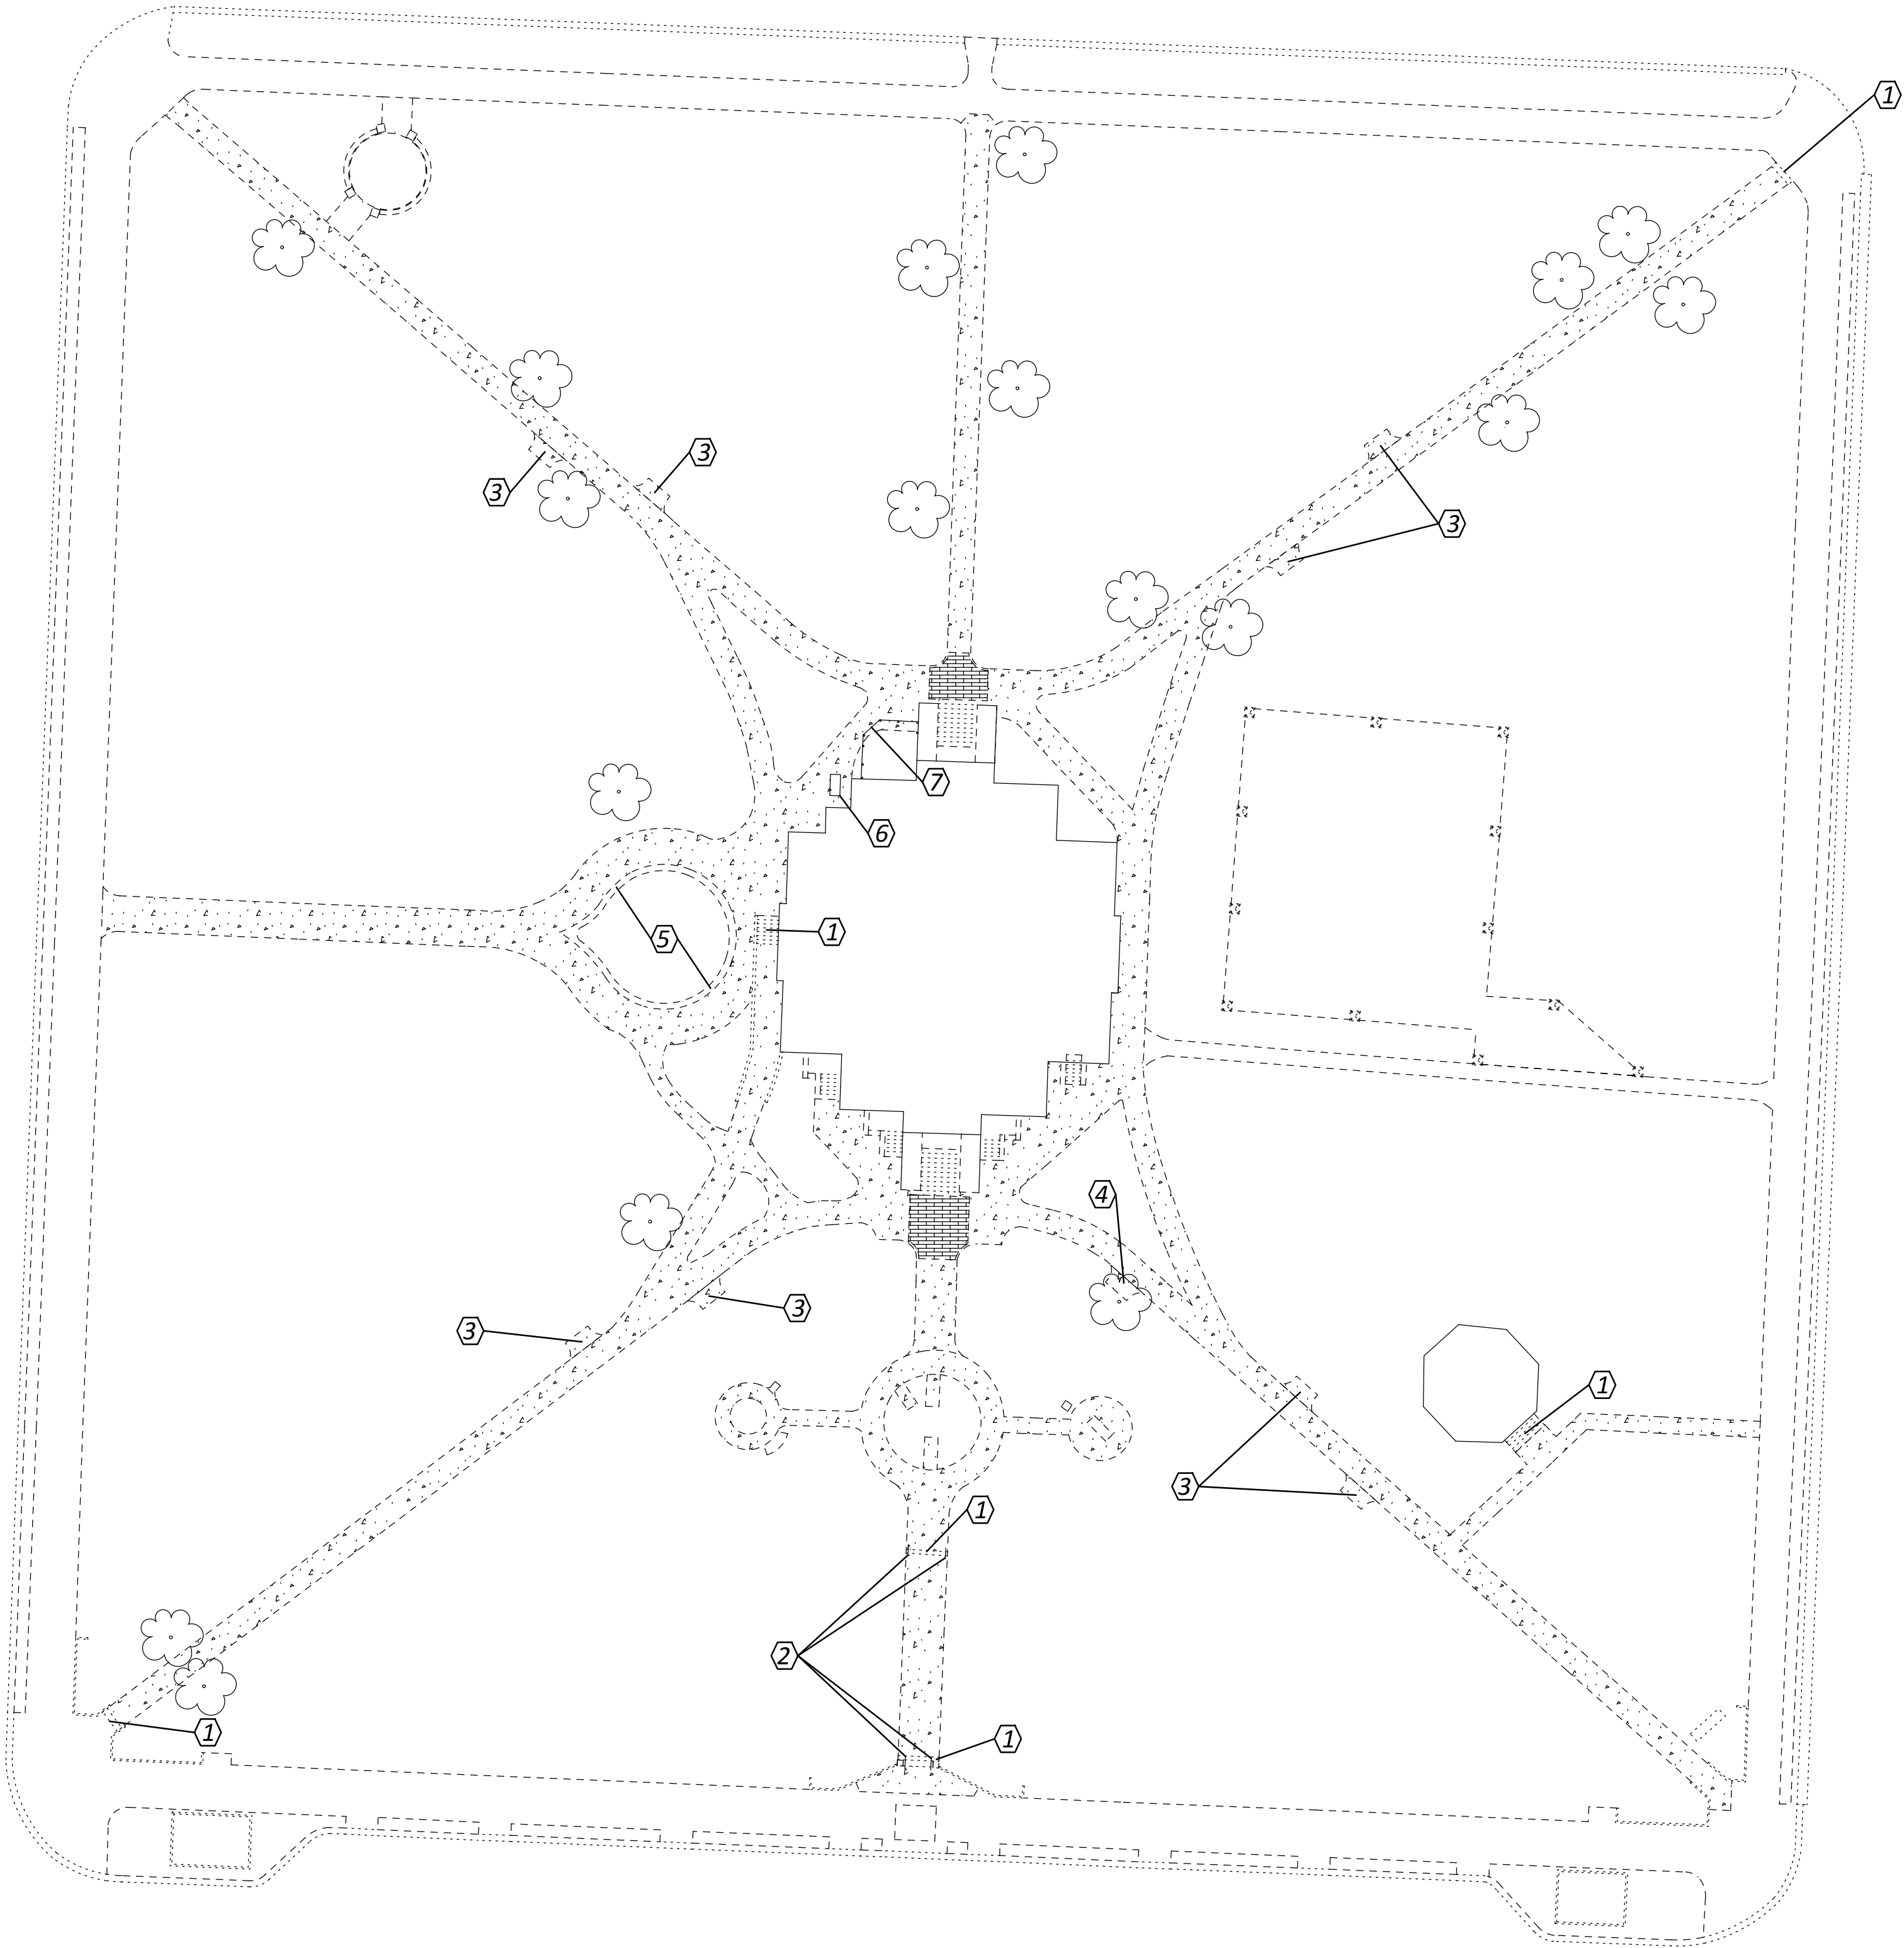

LEGEND


- WALK TO BE REMOVED
- DECORATIVE WALK TO BE REMOVED
- STEP(S) TO BE REMOVED
- HANDRAILS TO BE REMOVED
- CONCRETE BENCH PAD TO BE REMOVED (SEE NOTE 8)
- CONCRETE BENCH PAD TO BE REMOVED AND RELOCATED
- MOUNTABLE CURB TO BE REMOVED
- GENERAC GENERATOR TO BE REMOVED (SEE NOTE 9)
- EXISTING PRIVACY FENCE TO BE REMOVED
- TREES WITHIN 8 FEET OF THE EDGE OF WALK

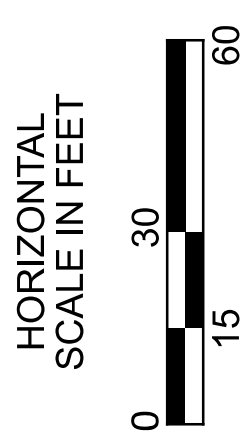

EXISTING CONDITIONS AND DEMOLITION PLAN


COSHOCTON COUNTY  
ENGINEER'S OFFICE  
(740) 622-2135 FAX: (740) 623-6512

DESIGNER	CJS
REVIEWER	CJS
PROJECT ID	03-24-25
2024102301	
SHEET	TOTAL
3	5



NOTES

1. ALL WORK SHALL BE COMPLETED IN ACCORDANCE WITH THE OHIO DEPARTMENT OF TRANSPORTATION (ODOT) CONSTRUCTION AND MATERIAL SPECIFICATIONS, 2023 EDITION, UNLESS OTHERWISE NOTED.
2. ALL SIDEWALKS, RAMPS, STEPS, AND HANDRAILS SHALL BE IN COMPLIANCE WITH THE STANDARDS OUTLINED IN THE AMERICANS WITH DISABILITIES ACT (ADA).
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR RE-ESTABLISHING THE NEW SIDEWALK IN THE SAME LOCATION AS THE EXISTING SIDEWALK THAT WAS REMOVED. THE CONTRACTOR SHALL PERFORM ANY MEASUREMENTS, STAKING, OR LAYOUT WORK THEY DEEM NECESSARY TO ENSURE PROPER ALIGNMENT AND COMPLIANCE WITH THE PLANS AND SPECIFICATIONS. SUPERVISION BY A LICENSED SURVEYOR IS NOT REQUIRED UNLESS SPECIFIED BY THE PROJECT MANAGER.
4. STAMPED CONCRETE PATTERN AND COLOR:  
STAMPED CONCRETE SHALL MATCH THE OLD BRICK RUNNING BOND PATTERN USED IN THE VETERANS MEMORIAL PLAZA. COLOR SHALL BE BRICK RED (1526) WITH SHADING USING DARK GRAY, SMOKEY BROWN, AND TILE RED. FINAL APPEARANCE SHALL CLOSELY RESEMBLE BELCREST 500 BRICK FROM BAIRD CONCRETE PRODUCTS.  
FINISHING AND SEALING REQUIREMENTS:  
STAMPED CONCRETE SHALL BE FINISHED PER ODOT ITEM 608 AND SEALED USING A SOLVENT BASED ACRYLIC SEALER APPROVED BY THE PROJECT MANAGER. A 4' x 4' MOCK-UP PANEL SHALL BE PREPARED FOR REVIEW AND APPROVAL PRIOR TO FULL INSTALLATION.
5. UPON APPROVAL BY THE COUNTY COMMISSIONERS, THE CONTRACTOR SHALL CONSTRUCT A PARKING AREA IN THE LOCATIONS IDENTIFIED AS ALTERNATE 1. THE PARKING AREA SHALL BE CONSTRUCTED USING THE SAME SECTION AND MATERIALS AS THE TYPICAL "HEAVY DUTY CONCRETE WALK" DETAIL SHOWN ON SHEET 5. ALL WORK SHALL BE INCLUDED IN THE ADD ALTERNATE LINE ITEM OF THE BID PROPOSAL.
6. REINSTALL STORED BENCHES ON NEW CONCRETE PADS. ANCHOR BENCH LEGS USING EXISTING OR NEW HARDWARE PER MANUFACTURER RECOMMENDATIONS.
7. THE EXISTING GENERAC GENERATOR SHALL BE REINSTALLED IN ITS ORIGINAL LOCATION AFTER THE NEW SIDEWALK HAS CURED TO THE REQUIRED STRENGTH. RECONNECTION SHALL BE PREFORMED BY A QUALIFIED TECHNICIAN, AND ALL ELECTRICAL AND MECHANICAL CONNECTIONS SHALL BE RESTORED IN ACCORDANCE WITH APPLICABLE CODES AND MANUFACTURER'S SPECIFICATIONS.
8. REMOVE AND SALVAGE EXISTING PRIVACY FENCE AS NEEDED FOR SIDEWALK CONSTRUCTION. REINSTALL SALVAGED SECTIONS AND EXTEND FENCE TO BUILDING CORNER AS SHOWN. NEW SECTION SHALL MATCH EXISTING IN HEIGHT, MATERIAL, AND APPEARANCE. A 3-FOOT WIDE GATE SHALL BE INCLUDED. CONSTRUCTION SHALL MAKE NECESSARY ADJUSTMENTS AT THE TERMINATION POINT TO ACHIEVE A CLEAN AND AESTHETICALLY PLEASING TRANSITION. ENTIRE FENCE, INCLUDING NEW AND EXISTING SECTIONS, SHALL BE REFINISHED TO MATCH.

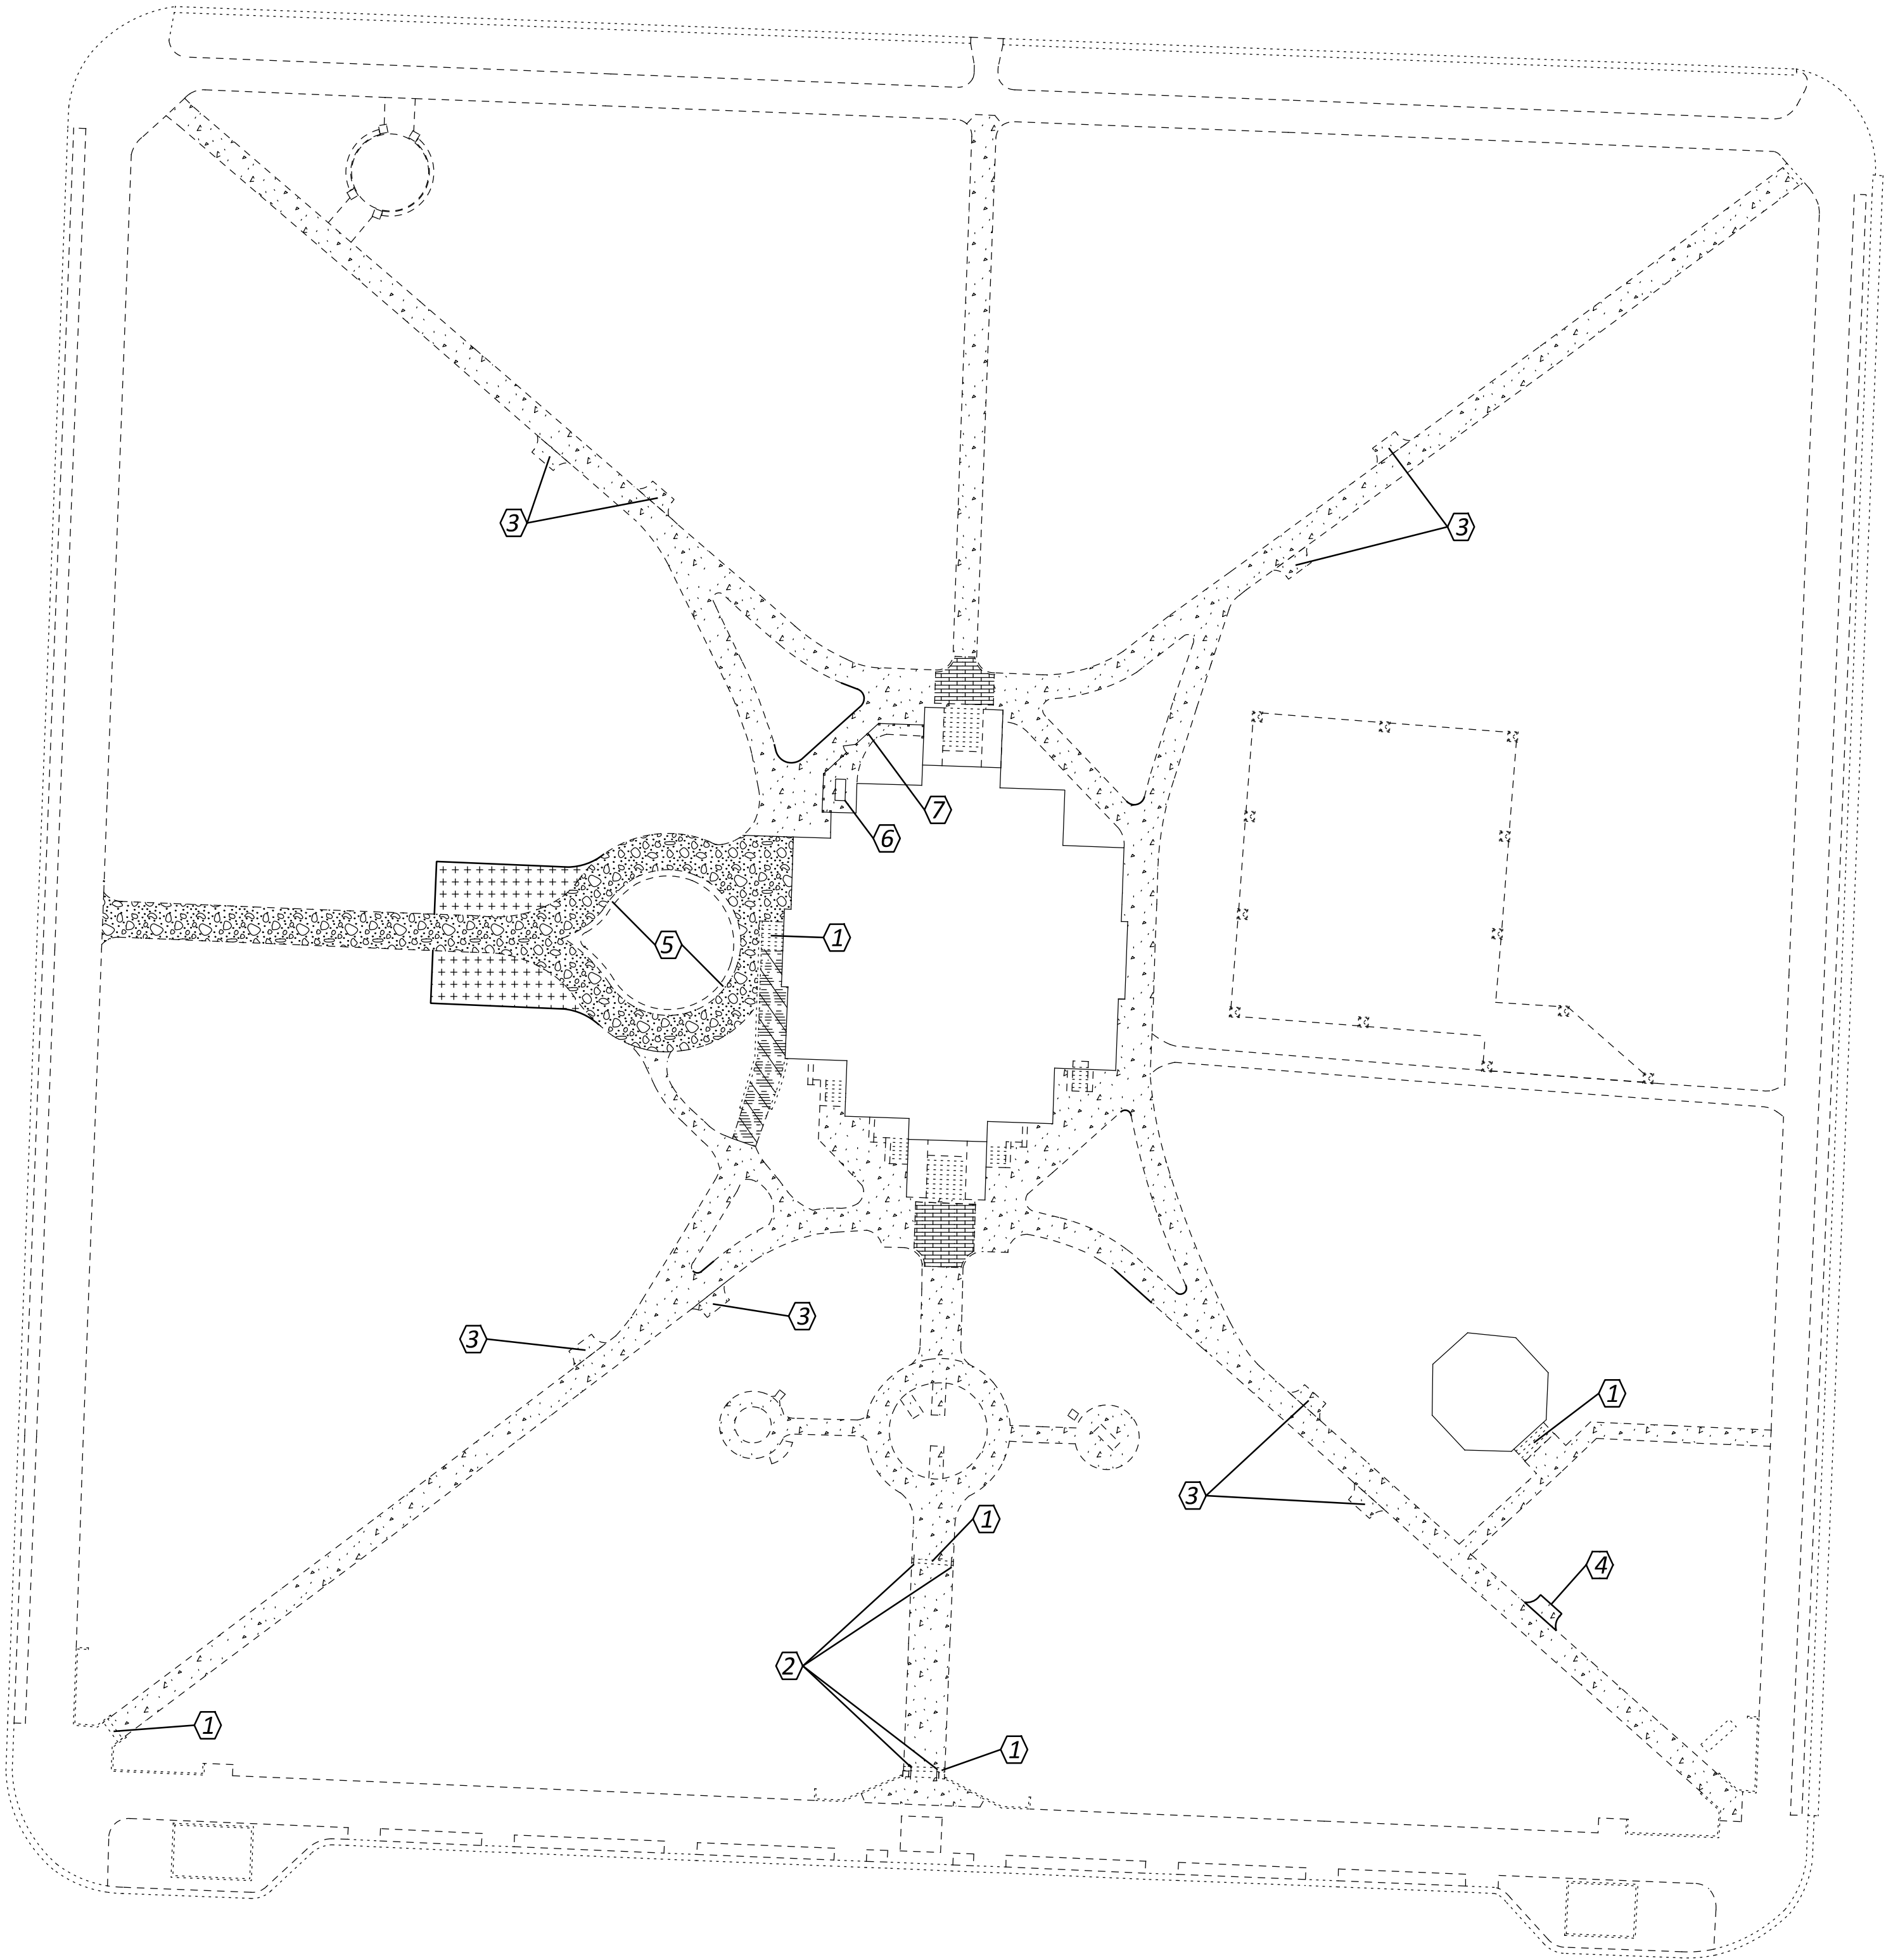


LEGEND

- STANDARD CONCRETE WALK (SEE SECTION/NOTES SHEET 5)
- HEAVY DUTY CONCRETE WALK (SEE SECTION/NOTES SHEET 5)
- STAMPED CONCRETE WALK (SEE NOTE 4)
- ADA RAMP TO BE REPLACED
- ALTERNATE 1 - PARKING AREAS (SEE NOTE 5)
- STEP(S) TO BE REPLACED
- HANDRAILS TO BE REPLACED
- CONCRETE BENCH PAD TO BE REPLACED (SEE NOTE 6)
- NEW CONCRETE BENCH PAD LOCATION (SEE NOTE 6)
- MOUNTABLE CURB TO BE REPLACED (SEE SECTION/NOTES SHEET 5)
- GENERAC GENERATOR TO BE REINSTALLED (SEE NOTE 7)
- PRIVACY FENCE TO BE REPLACED/EXTENDED (SEE NOTE 8)

PROPOSED SITE PLAN

COSHOCTON COUNTY  
ENGINEER'S OFFICE  
(740) 622-2135 FAX: (740) 623-6512



DESIGNER  
CJS

REVIEWER  
CJS 03-24-25


PROJECT ID  
2024102301

SHEET	TOTAL
4	5






STANDARD CONCRETE WALK SECTION

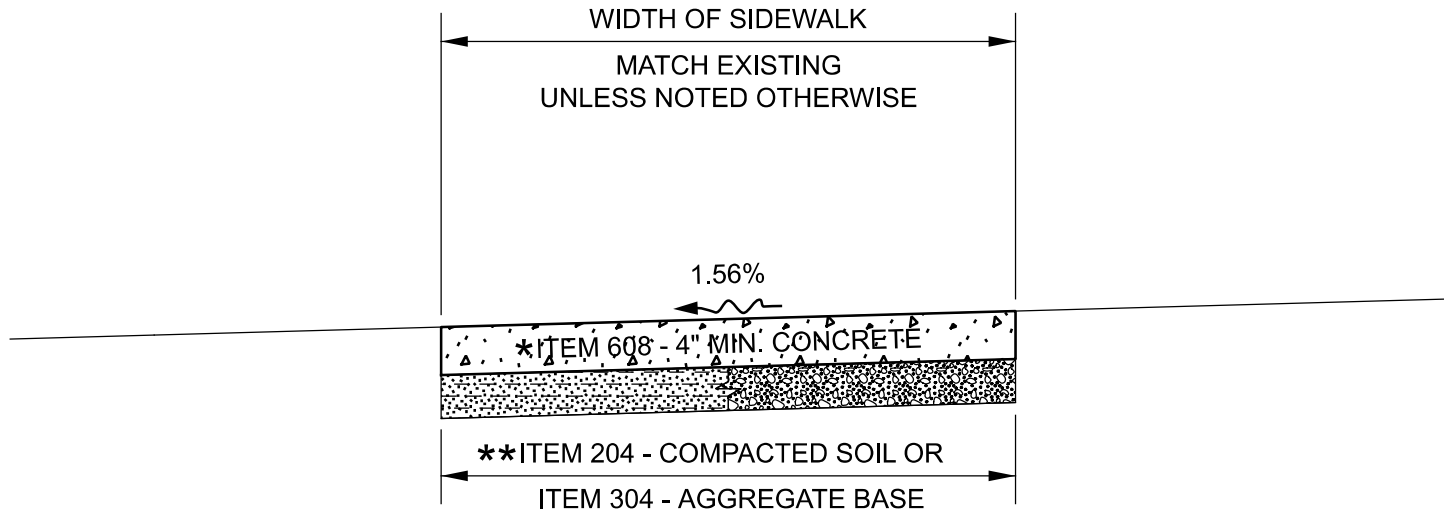

- \*THE MINIMUM THICKNESS FOR NEW CONCRETE WALKS SHALL BE 4 INCHES.
- \*\*THE SUBGRADE SHALL BE PREPARED IN ACCORDANCE WITH ODOT ITEM 204. IF UNSUTABLE SOIL IS ENCOUNTERED DURING PREPARATION, THE CONTRACTOR SHALL REMOVE THE UNSUITABLE MATERIAL AND REPLACE IT WITH ITEM 304 AGGREGATE BASE, COMPACTED TO MEET THE REQUIREMENTS OF ODOT ITEM 304. ALL WORK MUST BE APPROVED BY THE PROJECT MANAGER OR INSPECTOR PRIOR TO PLACEMENT OF THE NEW SIDEWALK.

HEAVY DUTY CONCRETE WALK SECTION

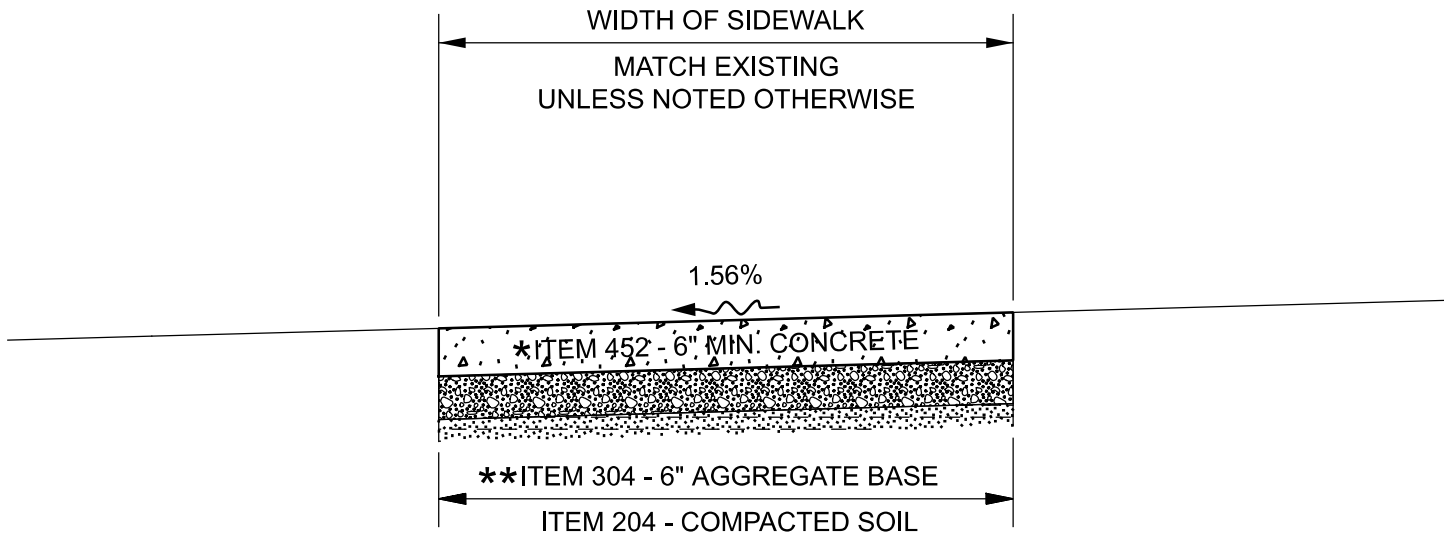


- \*THE MINIMUM THICKNESS FOR HEAVY DUTY CONCRETE WALKS SHALL BE 6 INCHES.
- \*\*A MINIMUM OF 6" AGGREGATE BASE SHALL BE PLACED AND COMPACTED TO MEET THE REQUIREMENT OF ODOT ITEM 304. SUBGRADE SHALL BE PREPARED IN ACCORDANCE WITH ODOT ITEM 204. ALL WORK MUST BE APPROVED BY THE PROJECT MANAGER OR INSPECTOR PRIOR TO PLACEMENT OF THE NEW SIDEWALK.

NOTES

- EXCAVATION REQUIRED TO INSTALL SIDEWALKS, BASE, OR CURBING SHALL BE INCIDENTAL TO THE ASSOCIATED PAY ITEM UNLESS OTHERWISE NOTED. CONTRACTOR SHALL STRIP TOPSOIL AND EXCAVATE SUBGRADE TO REQUIRED DEPTHS TO INSTALL BASE AND CONCRETE PER PLANS.
- SURFACE SLOPES SHALL BE CONSTRUCTED TO ENSURE PROPER DRAINAGE. MAXIMUM CROSS SLOPE SHALL BE 1.56%, AND LONGITUDINAL SLOPE SHALL NOT EXCEED 5%.
- CONCRETE SIDEWALKS SHALL BE CONSTRUCTED IN ACCORDANCE WITH ODOT ITEM 608.
- CONCRETE MIX DESIGN SHALL MEET THE REQUIREMENTS OF ODOT ITEM 499 AND BE APPROVED BY THE PROJECT MANAGER PRIOR TO PLACEMENT.
- EXPANSION JOINT LOCATIONS AND SPACING PER ITEM 608.03.
- WHERE NEW SIDEWALK ABUTS ADJOINING SIDEWALK, SAWCUT EXISTING WALK TO THE NEAREST JOINT AND INSTALL EXPANSION JOINT.
- SIDEWALKS SHALL BE FINISHED TO PROVIDE A SLIP RESISTANCE SURFACE.
- ALL CONCRETE SHALL BE CURED IN ACCORDANCE WITH ODOT ITEM 451. PROPER CURING COMPOUNDS SHALL BE APPLIED IMMEDIATELY AFTER FINISHING.

MOUNTABLE CURB

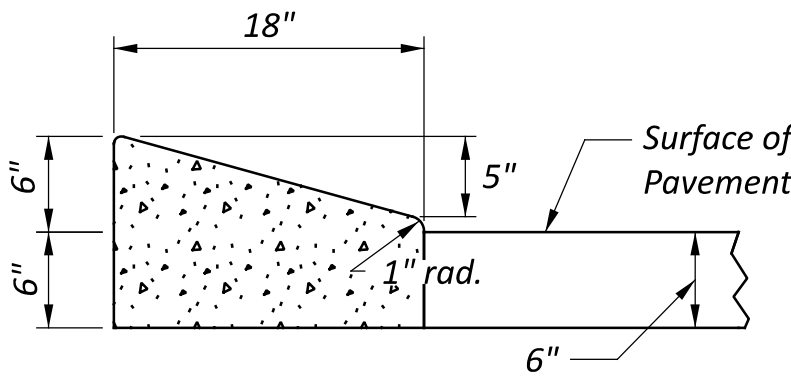

\* TYPE 10  
(MODIFIED)

\*CURB SECTION IS MODIFIED ODOT TYPE 10 CURB. FOR ADDITIONAL CONSTRUCTION REQUIREMENTS, SEE ODOT STANDARD CONSTRUCTION DRAWING BP-5.1.


\*ESTIMATED QUANTITIES

	DESCRIPTION	UNIT	QUANTITY
202	WALK REMOVED	SF	15966
202	DECORATIVE BRICK WALK REMOVED	SF	355
202	STEPS REMOVED	FT	127
202	MOUNTABLE CURB REMOVED	LF	115
-	REMOVE EXISTING BENCH	EA	9
-	REMOVE EXISTING PRIVACY FENCE	LF	26
204	SUBGRADE COMPACTION	SY	1796
207	TEMPORARY SEDIMENT AND EROSION CONTROLS	LS	1
517	HAND RAILING	EA	4
304	AGGREGATE BASE	CY	79
608	STANDARD CONCRETE WALK	SF	13378
608	HEAVY DUTY CONCRETE WALK	SF	2425
608	STAMPED CONCRETE WALK	SF	355
608	CONCRETE STEPS	FT	121
608	ADA RAMP	SF	310
-	REINSTALL PRIVACY FENCE	LF	25
-	NEW PRIVACY FENCE	LF	17
-	REINSTALL EXISTING BENCH	EA	9
-	REMOVE AND REPLACE GENERAC GENERATOR	LS	1
609	CONCRETE CURB	LF	115
614	MAINTAINING TRAFFIC	LS	1
621	MOBILIZATION	LS	1
659	SEEDING AND MULCHING	SY	1080
ALTERNATE 1 - PARKING AREA			
304	AGGREGATE BASE	CY	15
608	HEAVY DUTY CONCRETE WALK	SF	810

\*THE ESTIMATED QUANTITIES PROVIDED ABOVE ARE FOR INFORMATIONAL PURPOSES ONLY AND ARE NOT GUARANTEED. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL QUANTITIES AND FIELD CONDITIONS PRIOR TO BIDDING AND CONSTRUCTION. ANY DISCREPANCIES OR ADDITIONAL QUANTITIES REQUIRED TO COMPLETE THE WORK AS PER THE PLANS AND SPECIFICATIONS SHALL BE ADDRESSED IN ACCORDANCE WITH THE CONTRACT TERMS.

CONSTRUCTION DETAILS

COSHOCTON COUNTY  
ENGINEER'S OFFICE  
(740) 622-2135 FAX: (740) 623-6512



DESIGNER

CJS

REVIEWER

CJS 03-24-25

PROJECT ID

2024102301

SHEET

5

TOTAL

5

HORIZONTAL  
SCALE IN FEET

