


# Coshocton County 2016 Construction Season

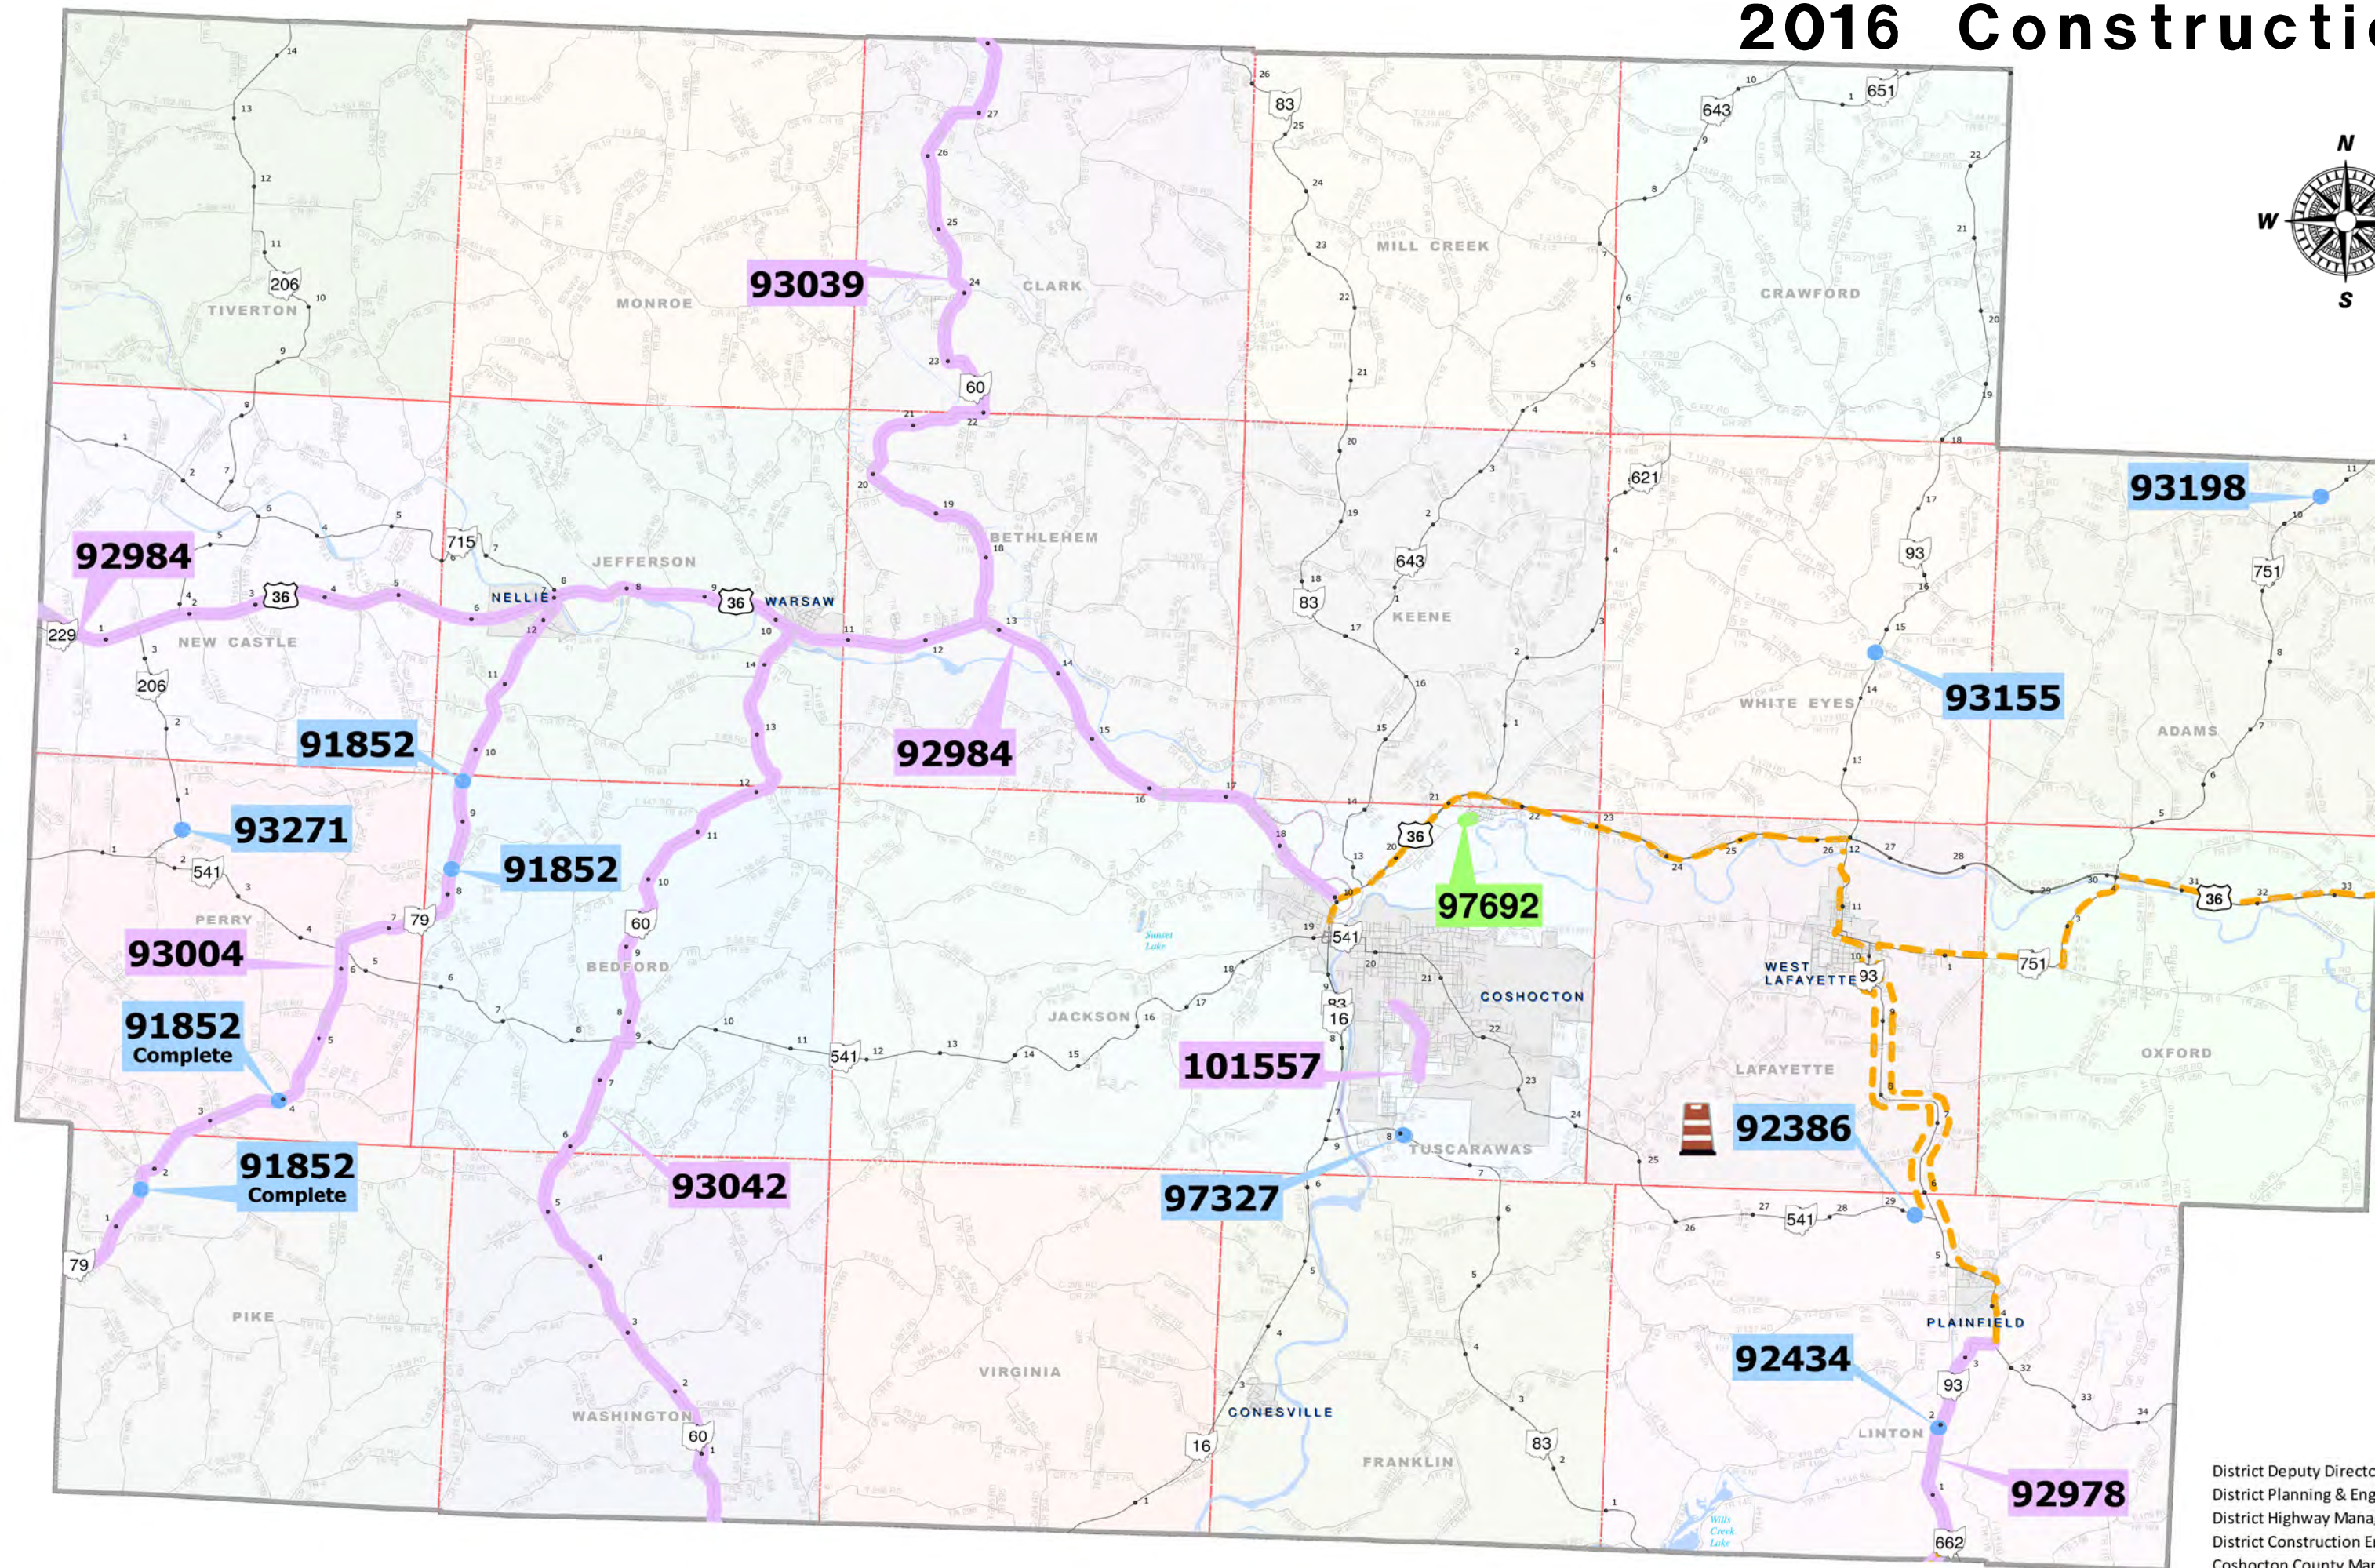

District Deputy Director: Dave Ray, P.E., P.S.  
 District Planning & Engineering Administrator: Jason Sturgeon, P.E.  
 District Highway Management Administrator: Tom Bradford, P.E.  
 District Construction Engineer: Keith Geiger, P.E.  
 Coshocton County Manager: Bill Sullivan  
<http://www.dot.state.oh.us/Districts/D05>

Prepared by:  
 The Ohio Department of Transportation  
 District 5 - GIS Mapping Section, March, 2016

PID	PROJECT NAME	WORK TYPE	AWARD DATE	ESTIMATED CONSTRUCTION COST	Description	Contract Features
91852	COS SR 79 01.58/03.91/08.33/9.50	Bridge Replacement	4/23/2015	\$3,140,919	Part 1 - COS-79-1.58; replace bridge with a 3 span slab including resurfacing approximately 200 feet each direction and related work. Part 2 - COS-79-3.91; replace bridge with a 3 span slab including resurfacing approximately 200 feet each direction and related work. Part 3 - COS-79-8.33; replace Bridge with a box beam bridge including resurfacing approximately 100 feet each direction and related work. Part 4 - COS-79-9.50; replace bridge with a box beam bridge including resurfacing approximately 200 feet each direction and related work.	
92386	COS SR 541 29.18	Bridge Replacement	4/13/2016	\$518,681	Replacement of bridge on SR 541 with single span slab.	
92434	COS SR 93 01.95	Bridge Replacement	10/29/2015	\$282,938	Replacement of bridge with box culvert.	A+B Contract
92978	COS/MUS SR 93/SR 208 VAR	Resurfacing, Undivided System	12/22/2015	\$4,510,501	Resurfacing with repairs on State Routes 93 and 208 in Muskingum and Coshocton County. Work includes addressing drainage concern at intersection of SR 93/Belle Road (TWP Road 169) by resurfacing existing limits of Belle Road and providing scratch/leveling course to adjust profile of SR 93 at this location for drainage improvement.	
92984	COS US 36/SR 60 00.00/14.51	Resurfacing, Undivided System	11/24/2015	\$2,680,860	Resurfacing roadway with related pavement repairs on US Route 36 and State Route 60 in Coshocton County.	
93004	COS SR 79 00.00	Resurfacing, Undivided System	4/13/2016	\$1,797,618	Resurfacing roadway with related work on State Route 79 in Coshocton County. Pavement treatment to include pavement repairs and 1.25" Item 441 Type 1 PG70-22M.	
93039	COS SR 60 17.12	Resurfacing, Undivided System	8/8/2016	\$3,162,240	Resurfacing roadway with related work on State Route 60 in Coshocton County.	
93042	COS/MUS SR 60 00.00/34.76	Resurfacing, Undivided System	5/30/2016	\$1,700,000	Resurfacing roadway and related work items on SR 60 in Muskingum and Coshocton Counties. Pavement treatment revised to a 1-inch smooth seal.	
93155	COS SR 93 14.66	Bridge Repair	10/15/2015	\$10,275	Bridge rehabilitation to include SDC overlay, new approach slabs, replacement of abutment from top of footer and utilize new integral standard with part width construction, extension of pile encasements to bottom of pier cap, patching of piers.	
93271	COS SR 206 00.59	Bridge Replacement	10/29/2015	\$351,945	Replacement existing twin 12' x 6' with a 20' x 8' box culvert.	A+B Contract
97327	COS/MUS CUV FY2016	Culvert Construction/Reconstr/Repair	5/30/2016	\$314,100	Culverts to be lined or repaired with spray on liner or field paving: MUS-70-03.89 (Ex. 60"x310'), MUS-16-05.55 (Ex. 90"x308'), MUS-16-08.05 (Ex. 60"x396'), MUS-16-08.23 (Ex. 60"x399'), MUS-16-11.13 (Ex. 48"x396'), COS-83-07.95 (Ex. 42"x220'), COS-83-07.97 (Ex. 48"x220').	
97692	FACD05 COS Coshocton FS	Facility Renovation	4/1/2015	\$7,982,888	Construction of new garage, new 1500 ton salt storage building, and wash bay at existing county garage location.	Facilities
101557	COS CR 91.00.82 Otsego Avenue	Mill and Fill	6/13/2016	\$298,720	Resurfacing and related work to Otsego Ave from 7th St to Pleasant Valley Dr.	